




TOP VIEW

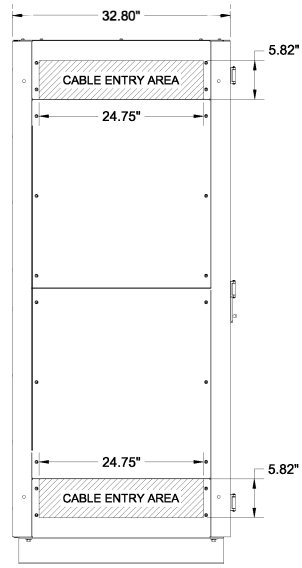


LEFT SIDE VIEW

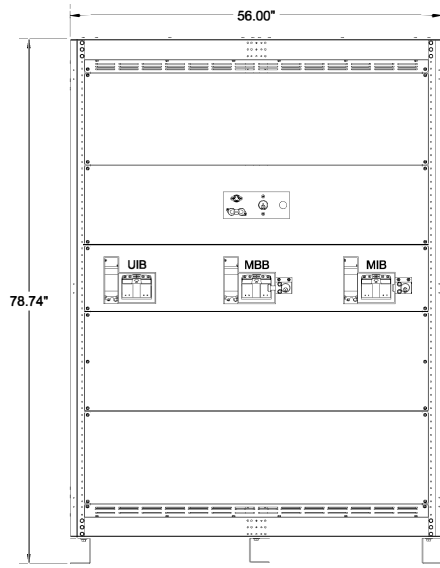


FRONT VIEW
(DOORS REMOVED)

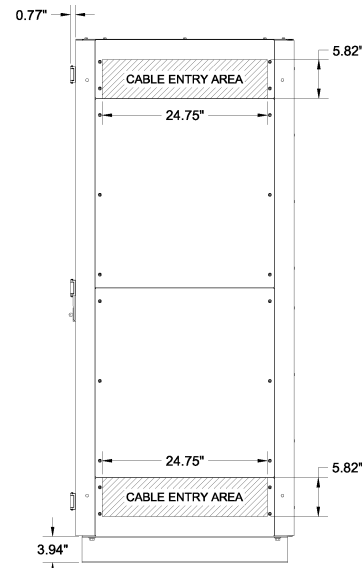

RIGHT SIDE VIEW

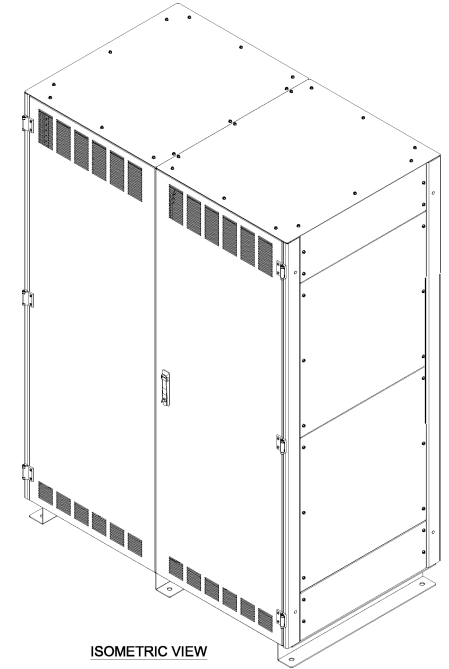

ISOMETRIC VIEW

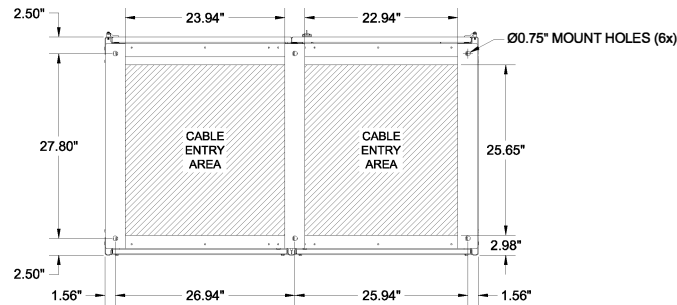

BOTTOM VIEW


NOTES:

- APPROXIMATE WEIGHTS:
1600A ASSEMBLY: 1300 LBS
2000A AND 2500A ASSEMBLY: 1400 LBS
- ASSEMBLY IS UL/CUL LISTED TO UL 891 AND C22.2 NO. 244.
- NEMA 1 TYPE ENCLOSURE.
- THE CABINET IS CONSTRUCTED FROM GALVANIZED STEEL.
- THE CABINET IS TO BE MOUNTED THROUGH THE 0.750" HOLES IN THE CABINET LEGS. THE LEGS ARE FORMED FROM 10 GAUGE STEEL.
- FINISH IS POWDER COAT ON ALL EXTERNAL AND VISIBLE SURFACES. INTERIOR PANELS AND MOUNT BRACKETS ARE GALVANIZED FINISH.
- CABINET LEGS ARE REVERSIBLE FOR EASY ACCESS TO CABINET FLOOR MOUNTING HARDWARE.

90817 SERIES MAINTENANCE BYPASS BREAKER CABINET			
1600-2500A, 480V, 3Ø 3W OR 4W, 3 BREAKER WITH SKRU			
INTERLOCK CONFIGURATION 42			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF C&C POWER, INC. ANY REPRODUCTION WITHOUT THE WRITTEN CONSENT OF C&C POWER, INC IS PROHIBITED.			
DIMENSIONS ARE IN INCHES		INITIALS	DATE
TOLERANCES:		DRAWN CH	8/17/2018
DECIMALS:	ANGLES:	CHECKED CH	8/17/2018
.XX ±.13	±1°		
.XXX ±.062			
SCALE: SIZE: A	REV: 1	SHEET 1 OF 2	
NTS		C&C POWER ENGINEERED POWER PRODUCTS WWW.CCPOWER.COM © 2018 C&C POWER, INC. ALL RIGHTS RESERVED	

DRAWING #: 90817-CC-02-5001-1 REV 1

CIRCUIT BREAKER SUMMARY			
BREAKER TYPE	BREAKER MODEL	TRIP	AIC
SQUARE D POWERPACT	RJF36160U31A	1600A	65K @ 480VAC
	RJF36160CU31A	1600A (100% RATED)	
	RJF36200U31A	2000A	
	RJF36200CU31A	2000A (100% RATED)	
	RJF36250U31A	2500A	
	RJF36250CU31A	2500A (100% RATED)	

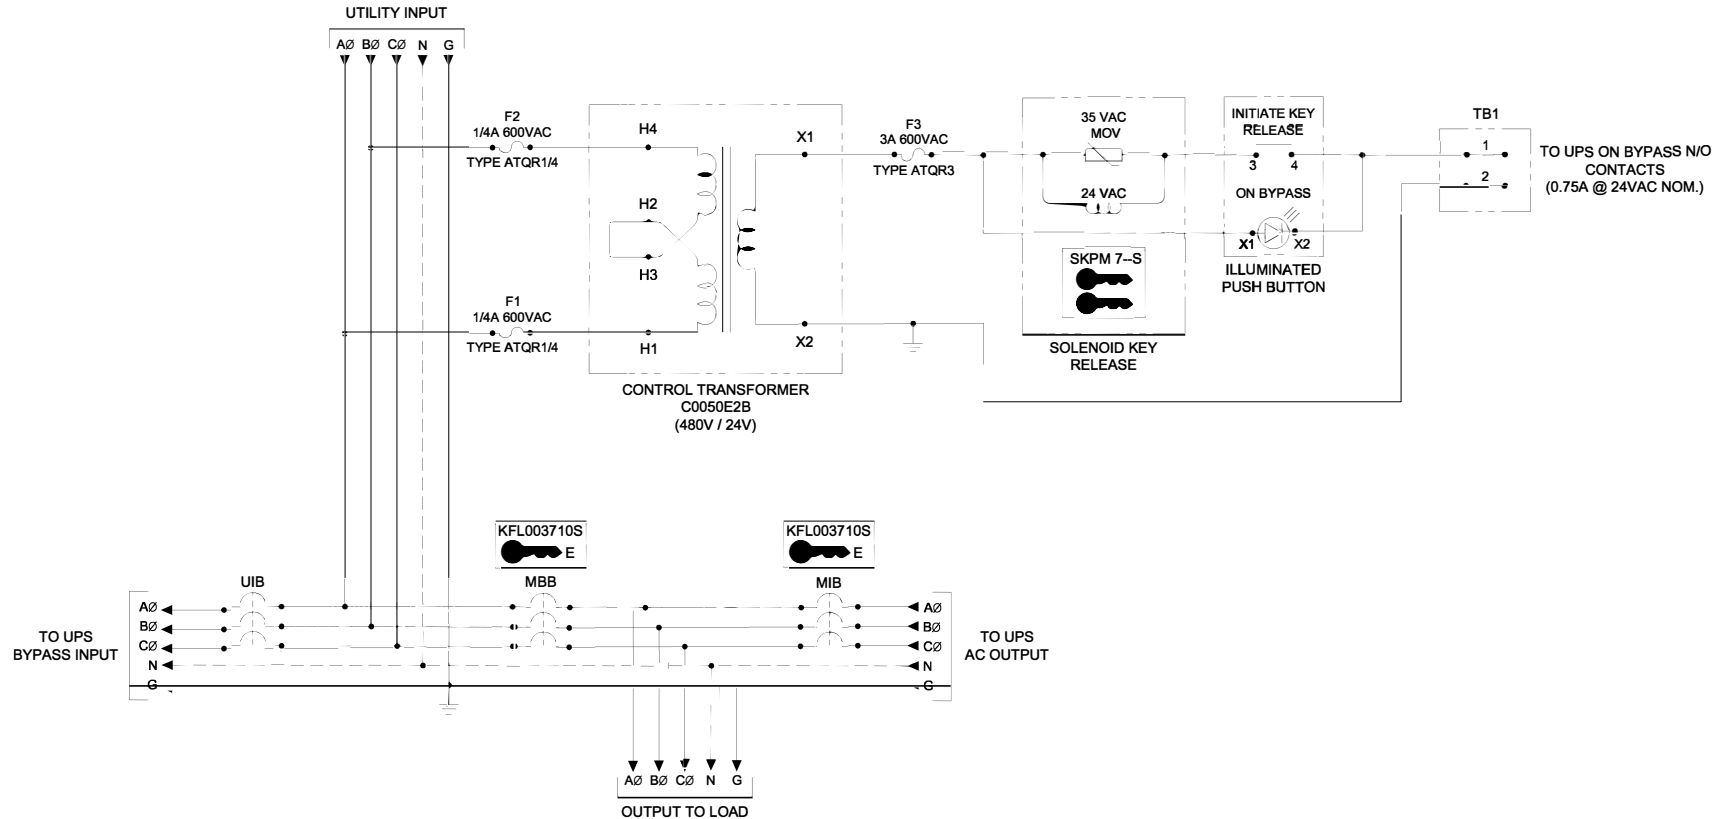

NOTES:

- "UIB" UPS INPUT BREAKER
- "MBB" MAINTENANCE BYPASS BREAKER
- "MIB" MAINTENANCE ISOLATION BREAKER
- ALL INTERNAL CONNECTIONS BETWEEN "UIB", "MBB" AND "MIB" ARE MADE USING COPPER BUS BARS.
- 1600A BYPASS ASSEMBLIES CONTAIN A 1600A RATED NEUTRAL BUS PROVIDED WITH MECHANICAL LUGS THAT ACCEPT A TOTAL OF (24) #2 - 600 MCM CABLES. 2000A-2500A BYPASS ASSEMBLIES CONTAIN A 2500A RATED NEUTRAL BUS PROVIDED WITH MECHANICAL LUGS THAT ACCEPT A TOTAL OF (24) #2 - 600 MCM CABLES.
- 1600A BYPASS ASSEMBLY UTILITY INPUT, TO UPS AC INPUT, TO UPS AC OUTPUT, & OUTPUT TO LOAD LUGS ACCEPT (4) #4 - 600 MCM CABLES PER POLARITY. 2000-2500A BYPASS ASSEMBLY UTILITY INPUT, TO UPS AC INPUT, TO UPS AC OUTPUT, & OUTPUT TO LOAD LUGS ACCEPT (8) #4 - 600 MCM CABLES PER POLARITY.
- GROUND LUG ACCEPTS (8) #6 - 350 MCM CABLES.
- VOLTAGE BETWEEN THE AØ AND BØ MUST BE 480V±10% FOR THE SKRU CIRCUIT TO FUNCTION PROPERLY.
- THIS DRAWING IS TO BE USED FOR ELECTRICAL PURPOSES ONLY AND DOES NOT REPRESENT THE ACTUAL MECHANICAL LAYOUT OF THE EQUIPMENT.

KIRK KEY NOTES:

- THE "E" OR "W" NEXT TO THE INTERLOCK INDICATES THE POSITION OF THE INTERLOCK BOLT WHEN THE KEY IS REMOVABLE. "E" = EXTENDED AND "W" = WITHDRAWN.
- THE KEY OR KEYS NEXT TO THE INTERLOCK INDICATES THE KEY NUMBER THAT FUNCTIONS WITH THE INTERLOCK.

90817 SERIES MAINTENANCE BYPASS BREAKER CABINET			
1600-2500A, 480V, 3Ø 3W OR 4W, 3 BREAKER WITH SKRU			
INTERLOCK CONFIGURATION 42			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF C&C POWER, INC. ANY REPRODUCTION WITHOUT THE WRITTEN CONSENT OF C&C POWER, INC IS PROHIBITED.			
DIMENSIONS ARE IN INCHES	INITIALS	DATE	
TOLERANCES:	DRAWN CH	8/17/2018	
DECIMALS: .XX ±.13	ANGLES: ±1"	CHECKED CH	8/17/2018
.XXX ±.082			
SCALE: NTS	SIZE: A	REV: 1	SHEET 2 OF 2
C&C POWER ENGINEERED POWER PRODUCTS WWW.CCPOWER.COM		© 2018 C&C POWER, INC.	
		ALL RIGHTS RESERVED	