



TOP VIEW

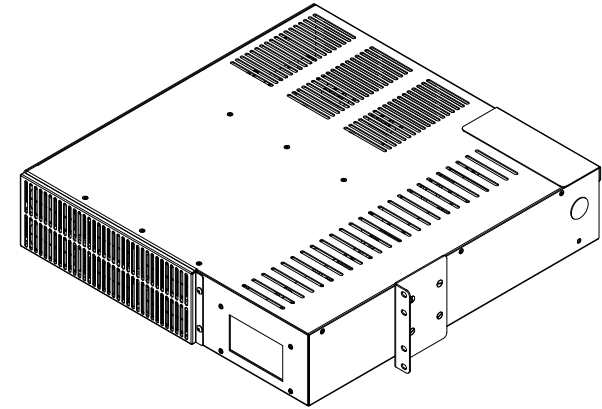

ISOMETRIC VIEW

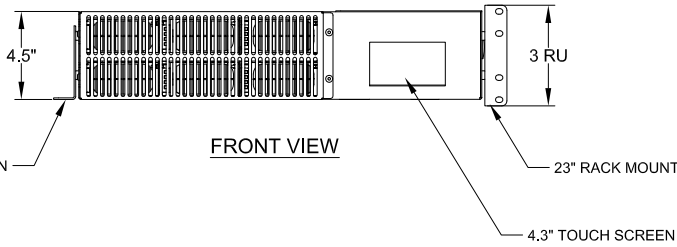


FRONT VIEW

TOP MOUNT ANGLE OPTION

23" RACK MOUNT ANGLE OPTION

4.3" TOUCH SCREEN




RIGHT SIDE VIEW

3/4" TRADE SIZE  
SIDE AC CONDUIT OPTION

3/4" TRADE SIZE  
REAR AC CONDUIT OPTION

AC WIRE ACCESS COVER




REAR VIEW

DC OUTPUT PLUG

MECHANICAL STYLE AC WIRE LANDINGS  
ACCEPTS #10 - #2 AWG

MECHANICAL GROUND LUG  
ACCEPTS #4 - #14 AWG



REAR VIEW  
(AC WIRE ACCESS COVER REMOVED)

NOMINAL OUTPUT VOLTAGE	AC INPUT VOLTAGE	CHARGER AC INPUT CIRCUIT PROTECTION	MAX DC OUTPUT CURRENT
48VDC	120VAC 1PH	20A	25A
	208/240VAC 1PH	20A	60A
72VDC	120VAC 1PH	40A	24A
	208/240VAC 1PH	40A	57A
120VDC	120VAC 1PH	60A	25A
	208/240VAC 1PH	60A	60A
144VDC	120VAC 1PH	60A	25A
	208/240VAC 1PH	60A	60A
240VDC	120VAC 1PH	100A	25A
	208/240VAC 1PH	100A	60A
288VDC	120VAC 1PH	120A	25A
	208/240VAC 1PH	120A	60A

NOTES:

- MOUNT ANGLES CAN BE ADJUSTED FOR 23" RACK MOUNTING OR CABINET TOP MOUNTING.
- DC OUTPUT CORD IS PROVIDED, 15' LONG WITH SINGLE HOLE LUGS FOR 1/4" BOLT.

92506 48VDC - 288VDC CHARGER SYSTEM			
--			
--			
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF C&C POWER, INC. ANY REPRODUCTION WITHOUT THE WRITTEN CONSENT OF C&C POWER, INC IS PROHIBITED.			
DIMENSIONS ARE IN INCHES		INITIALS	DATE
TOLERANCES:		DRAWN PJC	9/5/2019
DECIMALS: .XX ±.13	ANGLES: ±1°	CHECKED CH	9/5/2019
SCALE: SEE NTS	REV: 1	SHEET 1 OF 1	

**C&C POWER**  
ENGINEERED POWER PRODUCTS  
WWW.CCPOWER.COM

© 2019 C&C POWER, INC.  
ALL RIGHTS RESERVED