

MORE POWER - LESS SPACE®



HIGH RATE SERIES

HR7500ET

- Exclusive IPF® Technology optimizes power capacity, cell consistency, and long-term reliability
- THT™ plastic case specifically formulated to optimize compression
- Advanced AGM technology for superior high-rate power
- Puncture resistant micro-porous glass mat separators extend life
- Front access design for easy installation and maintenance
- Reinforced case resists bulging and meets safety requirements (UL 94 V-0)
- Case & cover heat sealed and 100% tested to prevent leaks
- Epoxy-sealed posts eliminate leaks
- Flame arresting, low pressure, self-sealing valves are 100% factory tested
- Computer-aided design and manufacturing control processes and standards to ensure quality products
- All batteries meet or exceed IEEE recommended practices
- Battery design and construction meet UL recognition requirements
- Plate thickness optimized for long life
- Guaranteed 100% initial string capacity when tested in accordance with IEEE 1188



SPECIFICATIONS


Nominal Voltage: 12-Volts
Rating: 750 Watts/Cell @ 15 min. rate to 1.67 V.P.C.
Positive Plate: >98% Pure lead with tin-calcium alloy
Negative Plate: Pure lead, calcium alloy
Post Seal: Epoxy-sealed
Terminal: Front access, 1/4" – 20 threaded insert
Case/Cover: Flame-retardant, THT™ – UL 94 V-0/>39% L.O.I.

Safety Vent: Low positive pressure, self-sealing w/ flame arrestor
Float Voltage: 2.25 V.P.C. ± 0.01 V.P.C. @ 77°F (25°C)
Design life: 10 years in float applications @ 77°F (25°C)
Dimensions: Length - 24.00" (609.6 mm)
 Width - 4.97" (126.3 mm)
 Height - 12.74" (323.5 mm)
Weight: 150 lbs. (68 kg)

DISCHARGE RATINGS IN WATTS PER CELL @ 77°F (25°C)†

Volts per Cell (V.P.C.)	1 MIN.	5 MIN.	10 MIN.	15 MIN.	20MIN.	30 MIN.	40 MIN.	50 MIN.	60 MIN.
1.60	N/A	1196	960	795	671	510	412	345	299
1.63	N/A	1157	932	777	663	507	410	344	298
1.65	N/A	1128	912	764	653	503	408	342	297
1.67	N/A	1098	892	750	644	499	406	341	296
1.70	N/A	1052	857	723	626	492	403	339	294
1.75	N/A	961	791	674	587	467	387	330	289

†Subject to change without notice.

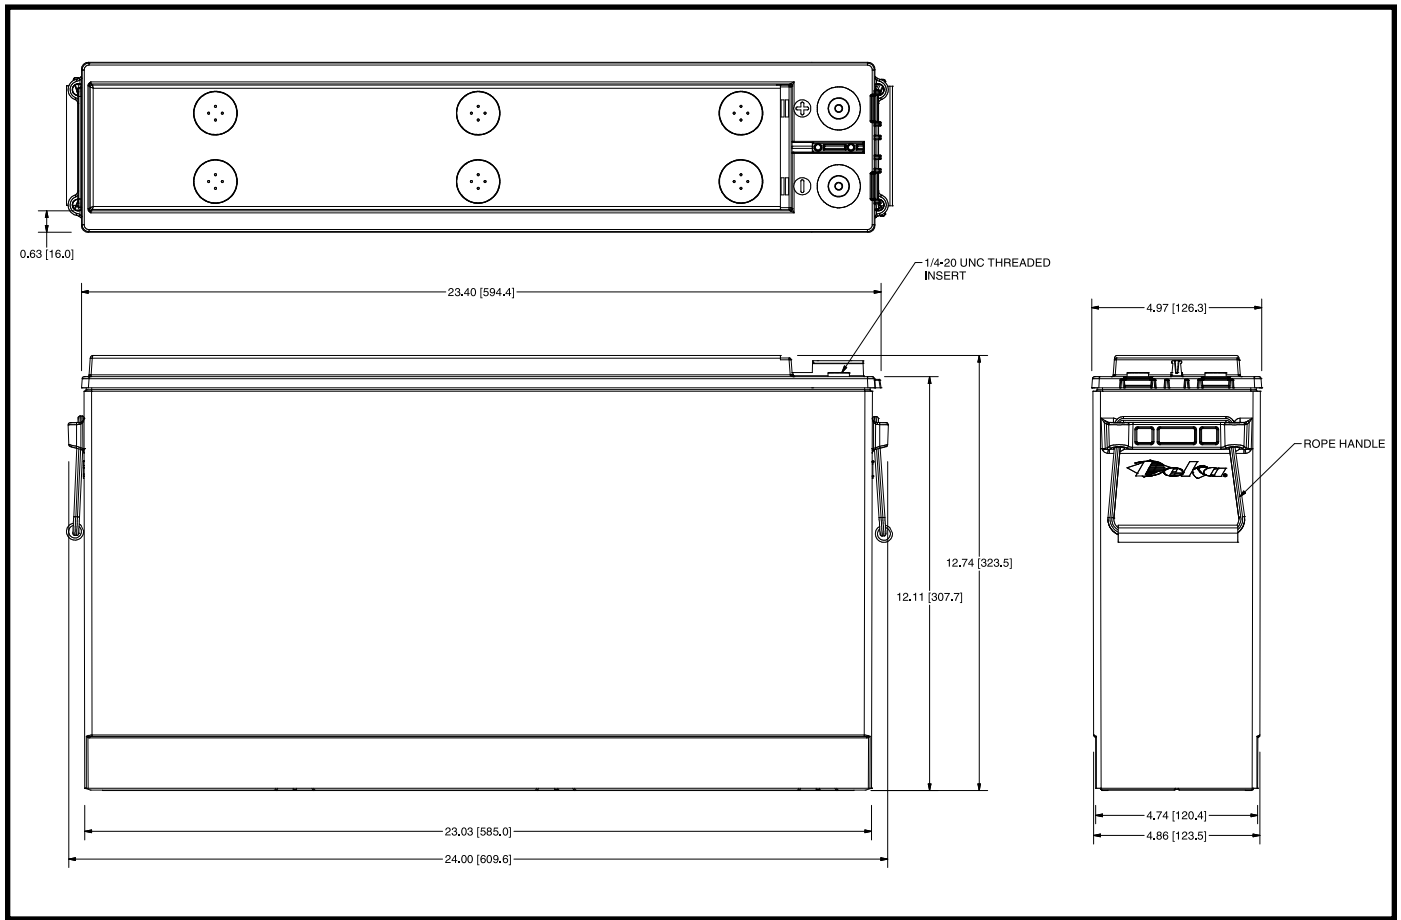


OPTIONAL FACTORY ACCEPTANCE TESTING

- More economical than performing a load test on site
- Confirms published capacity rating of product
- Establishes a factory baseline ohmic reading
- Formal test report provided
- Contact your East Penn Mfg. representative for additional information

TESTING SPECIFICATIONS

- Exceeds IEEE-1188 standards
- 10 minute battery rate to 1.67 V.P.C.
- Constant power discharge
- String \geq 100% capacity — All individual batteries \geq 95% capacity
- Conductance readings taken before the test
- Battery voltage recorded on report every 2 minutes



INSTALLATION AND OPERATING INSTRUCTIONS

- <http://www.eastpennmanufacturing.com/wp-content/uploads/High-Rate-IO-Manual-0970.pdf>



www.dekabatteries.com



East Penn Manufacturing Co. Lyon Station, PA 19536-0147 Phone: 610-682-3263 Fax: 610-682-0891 e-mail: reservepowersales@dekabatteries.com