

# Deka®

## High Rate

# HRC

## HRC950

- **Exclusive Compu-Press grid technology optimizes energy transfer to maximize high rate power**
- Advanced AGM technology for superior high-rate power
- Puncture resistant micro-porous glass mat separators extend life
- Reinforced case resists bulging and meets safety requirements (UL 94 V-0)
- Case & cover heat sealed and 100% tested to prevent leaks
- Epoxy sealed posts eliminate leaks
- Flame arresting, low-pressure, self-sealing valves are 100% factory tested
- Computer-aided design and manufacturing control processes and standards to ensure quality products
- All batteries meet or exceed IEEE recommended practices
- Battery design and construction meet UL recognition requirements
- Plate thickness optimized for long life
- Guaranteed 100% initial string capacity when tested in accordance with IEEE 1188



### SPECIFICATIONS

**Nominal Voltage:** 12-Volts

**Rating:** 550 Watts/Cell @ 15 min. rate to 1.67 V.P.C.

**Positive Plate:** >98% Pure lead with tin-calcium alloy

**Negative Plate:** Pure lead, calcium alloy

**Post Seal:** Epoxy-sealed

**Terminal:** Top access, 1/4" – 20 threaded insert

**Case/Cover:** Flame-retardant, polypropylene – UL 94 V-0/>28% L.O.I.

**Safety Vent:** Low positive pressure, self-sealing w/ flame arrestor

**Float Voltage:** 2.25 V.P.C. ± 0.01 V.P.C. @ 77°F (25°C)

**Design life:** 10 years in float applications @ 77°F (25°C)


**Dimensions:** Length - 13.46" (341.9 mm)  
Width - 6.84" (173.7 mm)  
Height - 11.21" (284.7 mm)

**Weight:** 105.5 lbs. (48 kg)

### DISCHARGE RATINGS IN WATTS PER CELL @ 77°F (25°C)†

Volts per Cell (V.P.C.)	1 MIN.	5 MIN.	10 MIN.	15 MIN.	20 MIN.	30 MIN.	40 MIN.	50 MIN.	60 MIN.
1.60	1366	992	737	572	471	350	279	233	200
1.63	1303	963	721	564	467	348	279	232	200
1.65	1273	938	707	557	463	347	278	232	199
1.67	1244	914	694	550	459	345	277	231	199
1.70	N/A	849	660	536	450	341	274	230	198
1.75	N/A	782	622	504	429	330	268	226	196

†Subject to change without notice.

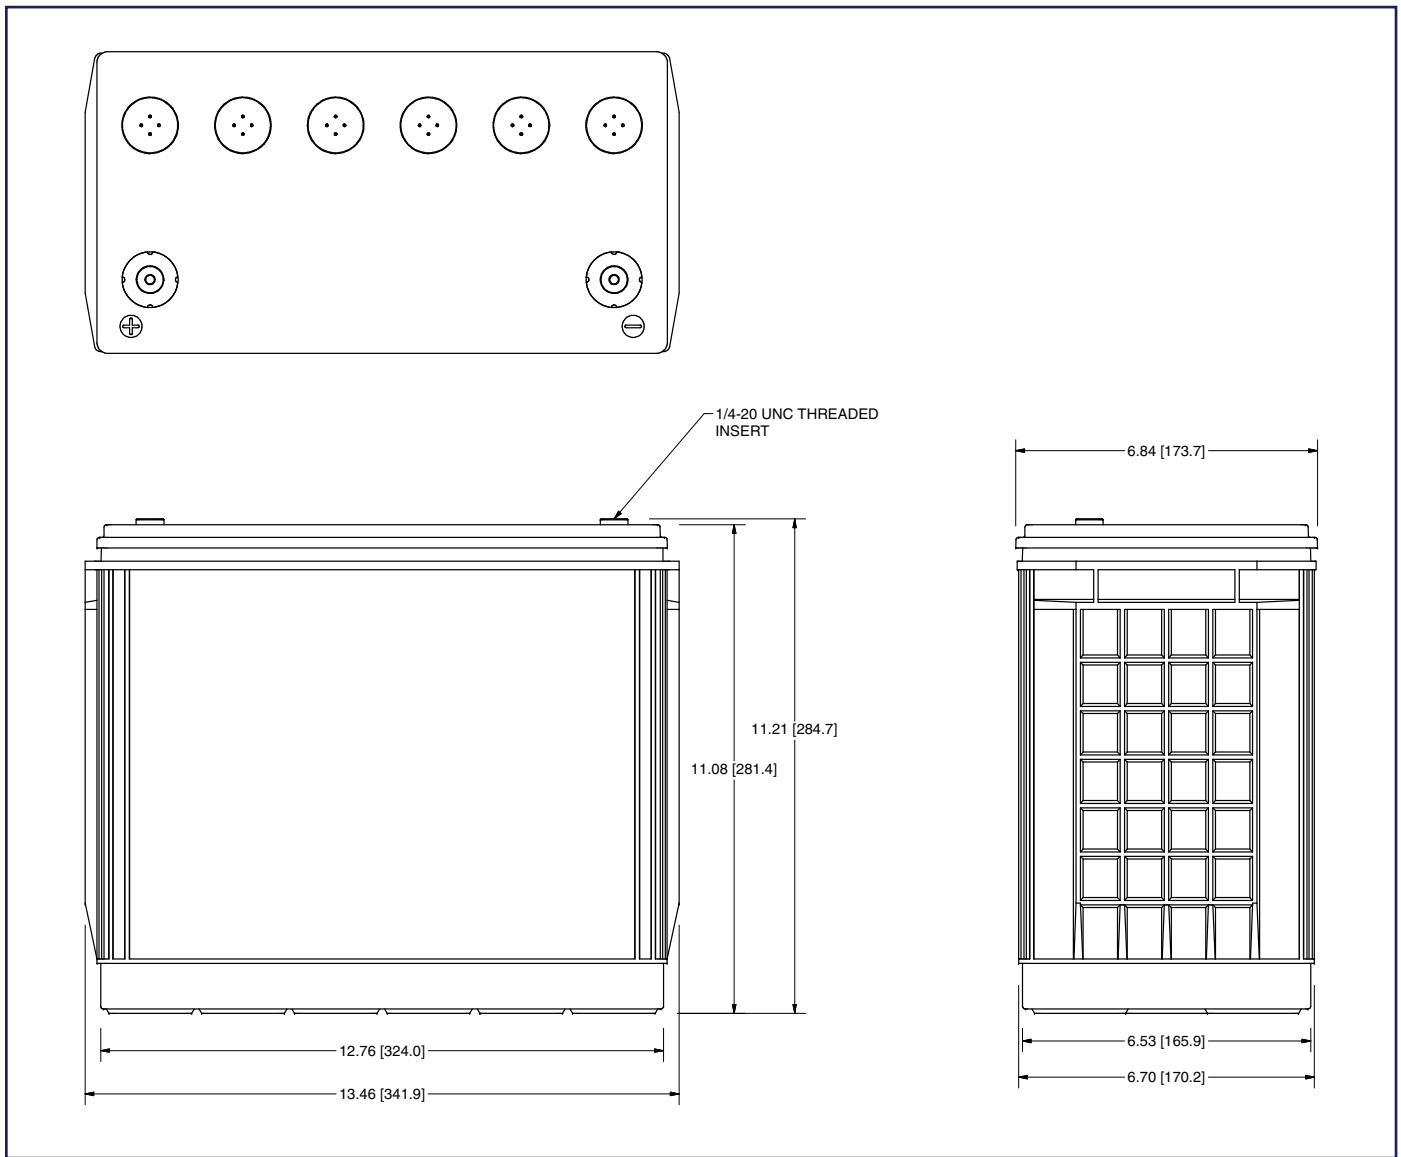

#### OPTIONAL FACTORY ACCEPTANCE TESTING

- More economical than performing a load test on site
- Confirms published capacity rating of product
- Establishes a factory baseline ohmic reading
- Formal test report provided
- Contact your East Penn Mfg. representative for additional information


#### TESTING SPECIFICATIONS

- Exceeds IEEE-1188 standards
- 10 minute battery rate to 1.67 V.P.C.
- Constant power discharge
- String  $\geq$  100% capacity — All individual batteries  $\geq$  95% capacity
- Conductance readings taken before the test
- Battery voltage recorded on report every 2 minutes

#### INSTALLATION AND OPERATING INSTRUCTIONS

[www.eastpennmanufacturing.com/wp-content/uploads/HRC-IO-Manual-2531.pdf](http://www.eastpennmanufacturing.com/wp-content/uploads/HRC-IO-Manual-2531.pdf)

**PROPOSITION 65 WARNING:** Battery posts, terminals and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Batteries also contain other chemicals known to the State of California to cause cancer. **WASH HANDS AFTER HANDLING.**



[www.dekabatteries.com](http://www.dekabatteries.com)

QUALITY SYSTEM  
CERTIFIED  
**ISO 9001**  
**IATF 16949**  
ENVIRONMENTAL  
SYSTEM CERTIFIED  
**ISO 14001**



East Penn Manufacturing Co.

Lyon Station, PA 19536-0147

Phone: 610-682-3263

Fax: 610-682-0891

e-mail: [reservepowersales@dekabatteries.com](mailto:reservepowersales@dekabatteries.com)